


Silver 'A' Rigid Flange Couplings with keyless shaft/hub connection

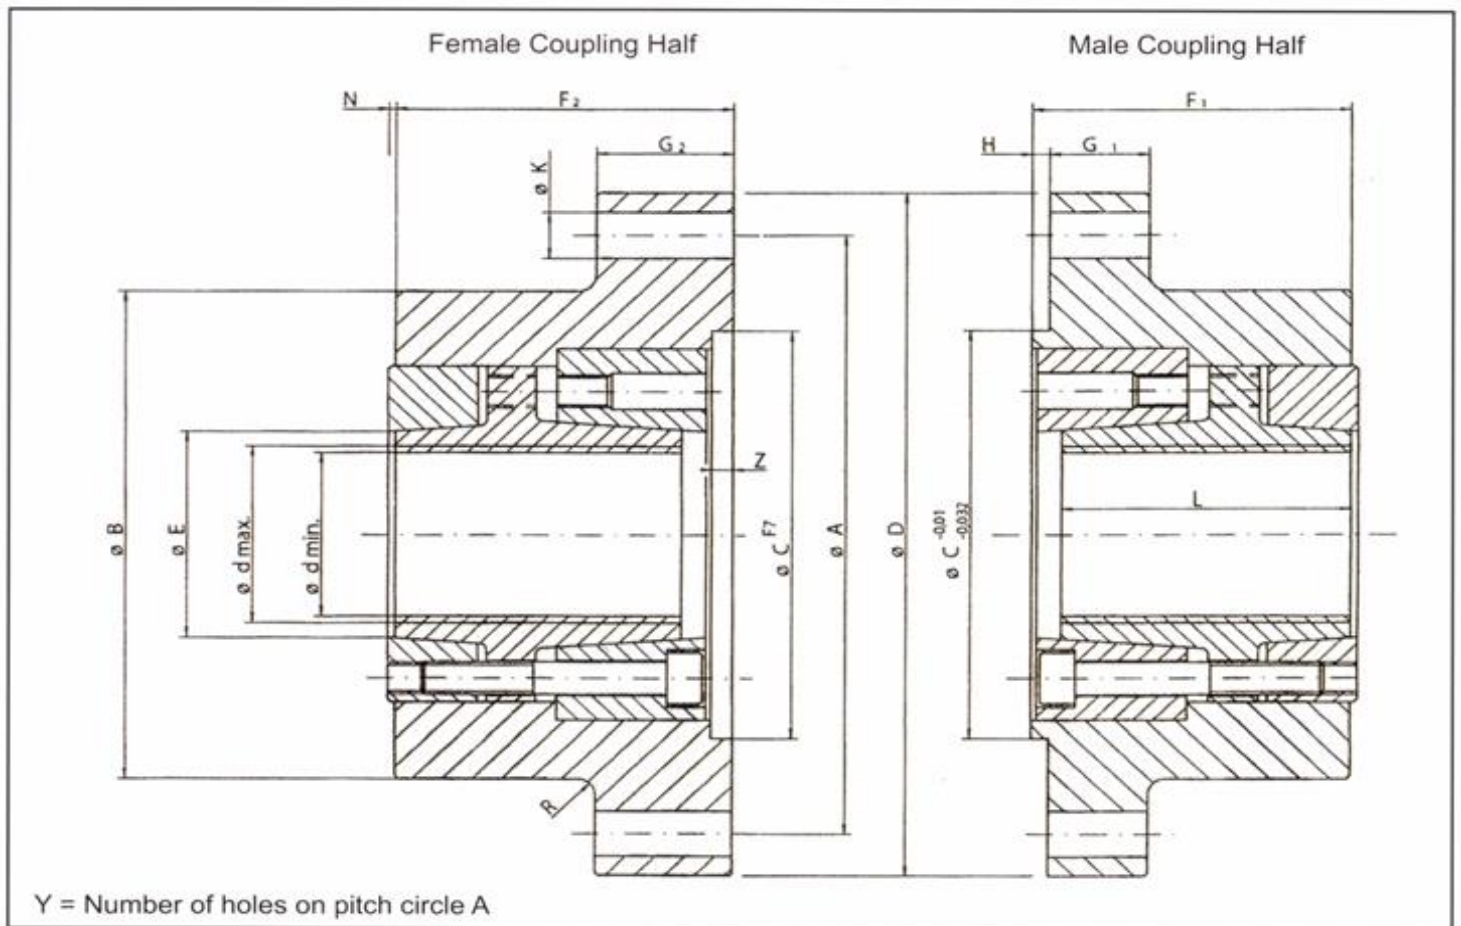

Technical Data

Size	Shaft mm	A mm	B mm	C mm	D mm	E mm	F ₁ mm	F ₂ mm	G ₁ mm	G ₂ mm	H mm	K mm	L mm	N mm	R mm	Y mm	Z mm
170/260	Min. 50 Max. 70	230	170	150	260	76	81	88	20	25	5	16	75	5	15	8	7
200/320	Min. 70 Max. 90	280	200	180	320	96	96	103	25	30	5	18	90	6	25	8	7
230/400	Min. 90 Max. 115	350	230	300	400	122	105	115	30	35	6	25	100	8	30	8	10
270/400	Min. 115 Max. 140	350	270	300	400	145	105	115	30	35	6	25	100	8	30	8	10
330/560	Min. 140 Max. 170	480	330	300	560	175	135	145	36	41	8	32	128	10	36	18	12
390/560	Min. 170 Max. 210	480	390	300	560	215	135	145	36	41	8	32	128	10	36	18	12
430/630	Min. 170 Max. 210	550	430	350	630	215	135	145	40	45	8	32	128	10	40	18	12
470/630	Min. 210 Max. 250	550	470	350	630	264	150	160	40	45	8	32	140	10	20	18	12
510/710	Min. 250 Max. 270	630	510	550	710	284	169	179	40	45	8	32	158	10	40	24	12
550/710	Min. 270 Max. 290	630	550	550	710	305	169	179	40	45	8	32	158	10	40	24	12

* Paired coupling halves the same colour can be interchanged due to matching flange patterns

Silver 'A' Power Transmission

Tel: 011 826-1000 / Email: paul@silvera.co.za / Email: francois@silvera.co.za